

# Hazardous Area Equipment

## Syrex Exd Bell



### Features

- Rated for Category 2 use (formerly Zone 1 & 2)
- ATEX approved
- II 2 G EExd e IIC T6
- Clear audible signal designed to penetrate background noise
- Weatherproof to IP66
- Rugged construction
- Choice of voltages

### Overview

The Exd Bell is designed for use in Zone 1 and 2 areas and for areas requiring a high degree of weatherproof protection. IP66 rated and certified to ATEX II2G EExd e IIC T6 it can be used in almost any environment.


With a sound output of up to 105dB, it provides a clear signal which stands out against background noise. A telephone ringing version is also available.

The housing is manufactured from glass fibre reinforced polyester with stainless steel fittings designed to cope in arduous conditions. In addition, all DC versions are equipped with a non-wearing electronic contact breaker which gives a long and reliable life.

- Fire
- Railway/Marine
- Security
- Hazardous Area
- Industrial
- Public Warning

### Applications

- General signalling; telephone ringing; fire and process control alarm

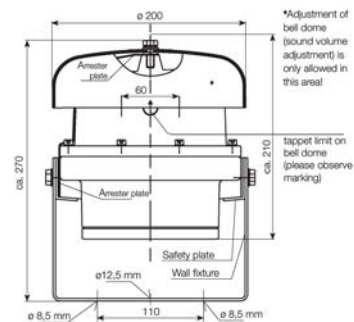

Part No.	Colours	Audibility at 1m	Tones	Voltage	Current
17-970232	Black/grey	Up to 105dB (A)	1	230V AC	60mA
17-970233	Black/grey	Up to 105dB (A)	1	110V AC	140mA
17-970234	Black/grey	Up to 105dB (A)	1	24V DC	320mA

IP Rating: IP66 Rating: Continuous Frequency: 1000Hz Operating Temp: -20°C to +40°C  
 Construction: Glass Fibre Reinforced Polyester Cable Entries: 1 Weight: 3.5kg