

# Ancillary Equipment

## Wall Mounted Door Retainer



### Features

- 200N holding force
- Zero residual force
- Approved to EN1155 and CE marked
- IP51 protection
- Fire resistant ABS casing
- Supplied with keeper plate

### Overview

Wall mounted door holders are designed to hold open fire doors for ease of entry and release them when the fire alarm is triggered. They are an integral part of any fire alarm system.


The unit comes complete with a manual release button that allows the door to be closed without operating the fire alarm.

Approved to EN1155, wall mounted door holders are surface mounted and housed in a Fire resistant ABS casing. Units come with knockouts for surface or back cable entry, and a spring loaded pin to give zero residual holding force when de-energised.

The 230V AC unit includes a filter for EMC emissions and is CE marked.

### Applications

- Hospitals, Offices, Hotels and Nursing Homes.

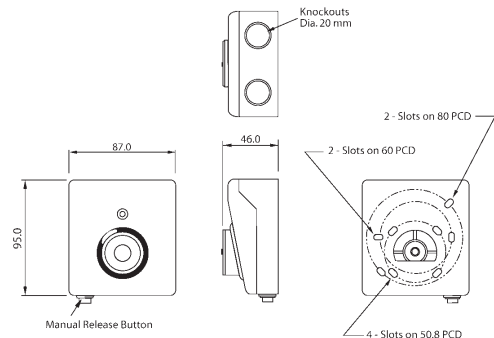

- Fire
- Security
- Industrial
- Railway/Marine
- Hazardous Area
- Public Warning

Part No.	Colours	Holding Force	Residual Holding Force	Voltage	Power Rating
17-970370	White	200N	Zero	24V DC	1.15W
17-970371	White	200N	Zero	230V AC	1.15W
<b>Accessories</b>					
17-970380	Adjustable 200N Keeper Plate				
17-970381	Floor Mounted Bracket				
17-970382	Chain Keeper c/w chain				
17-970383	Chain Keeper c/w chain & O Ring				

IP Rating: IP51   Rating: N/A   Frequency: N/A   Operating Temp: 0°C to -40°C  
 Construction: Fire resistant ABS   Cable Entries: 2   Weight: 360g   Compliance: EN1155